

# Stadi LD-17/20 WS

## DETAILS

|               |  |
|---------------|--|
| Articlenumber | 1-953  |
| Function      | hinged door  |
| Türenmaterial | timber, metal, PVC   |
| Application   | exterior door, interior door                                       |
| Usage         | sound protection, smoke protection, fire protection, accessibility |

## TECHNICAL DATA



|                        |                              |
|------------------------|------------------------------|
| Width                  | 17 mm                        |
| Height                 | 20 mm                        |
| Min. delivery length   | 635 mm                       |
| Max. delivery length   | 1600 mm                      |
| Standard length        | 750, 900, 1050, 1200 mm      |
| max. travel            | 16 mm                        |
| Actuation              | single-sided                 |
| Actuator               | sliding acuator              |
| removableInner profile | yes                          |
| Outerprofile           | aluminium                    |
| Surface                | plate finish                 |
| Sealingprofile         | silicone, self-extinguishing |

## FITTING

|                   |                      |
|-------------------|----------------------|
| Fixing            | WS - fixing brackets |
| Espagnolette bolt | yes                  |

## EXAMINATIONS AND CERTIFICATES

|                          |     |
|--------------------------|-----|
| Permanent function IM    | yes |
| Mio Certificate          | yes |
| Leakage rate certificate | yes |
| Barrier free             | yes |
| UL                       | yes |
| EPD                      | yes |
| Certifire                | yes |

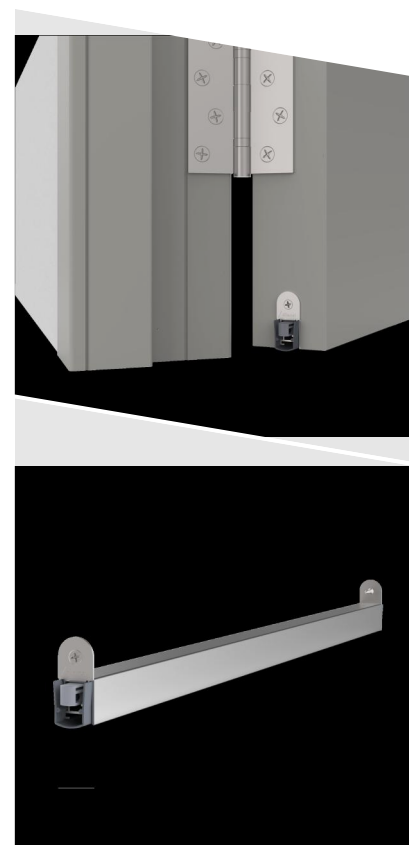

# Stadi LD-17/20 WS

